




**READY TO GO - FAST DELIVERY**

**PD175V**


**Telescopic platform with articulated boom  
mounted on Mercedes Sprinter CDI 517**



## Standard features



## Options



## Technical specifications

Max. working height:	17.35 m
Max. outreach:	9.80 m
Cage load capacity:	265 kg
Total unit weight:	4480 kg
Payload capacity:	810 kg
Platform rotation:	2 x 230°
Safe working angle:	2°/5°
Isolation:	1000V

## Key features

This PD175V (serial no. 31175137) mounted on a Mercedes Sprinter CDI 517 is ready to go and can be delivered right away.


### Specifications:

175° movable cage boom. OD-type outriggers. Large cargo space with Modul-System van racking. Galvanized subframe. Electric/hydraulic control. Home function. Operating without outriggers. Outriggers can be deployed even when the platform is not in transport position. The option to deploy an outrigger on one side only. Operating Various warning lights. LED lights at the bottom of the cage. Ramp up/down functions on booms ensuring a long service life. Sensors on all functions. Max. cage capacity of 265 kg. 175° movable cage boom. 2x80° cage rotation. 810 kg payload capacity (excl. driver, passenger and full tank).

## Images



## Diagrams

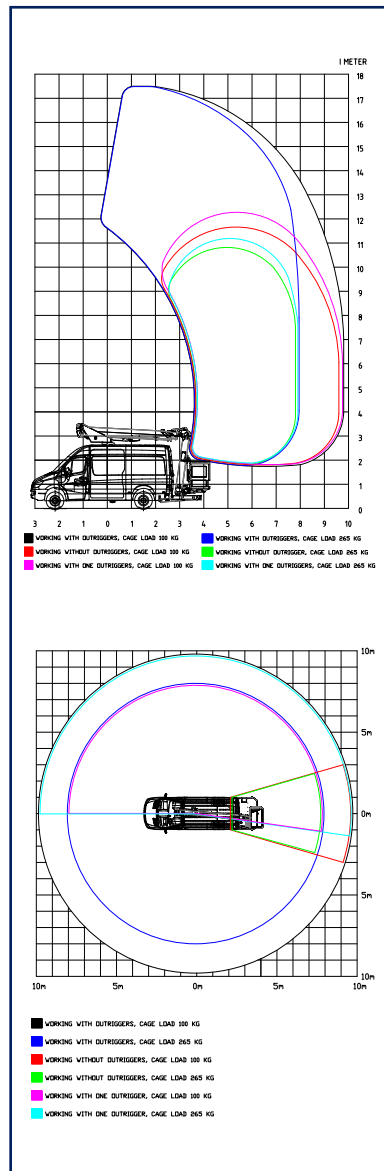

Danilift A/S reserves the right to change technical information without notice.