




READY TO GO - FAST DELIVERY

PD175V

**Telescopic platform with articulated boom
mounted on Mercedes Sprinter CDI 517**



Standard features



Options



Technical specifications

Max. working height:	17.35 m
Max. outreach:	9.80 m
Cage load capacity:	265 kg
Total unit weight:	4620 kg
Payload capacity:	670 kg
Platform rotation:	2 x 230°
Safe working angle:	2°/5°
Isolation:	1000V

Key features

This PD175V (serial no. 31175142) mounted on a Mercedes Sprinter CDI 517 is ready to go and can be delivered right away.


Specifications:

175° movable cage boom. OD-type outriggers. Large cargo space with Modul-System van racking. Galvanized subframe. Electric/hydraulic control. Home function. Operating without outriggers. Outriggers can be deployed even when the platform is not in transport position. The option to deploy an outrigger on one side only. Operating Various warning lights. Ramp up/down functions on booms ensuring a long service life. Sensors on all functions. Max. cage capacity of 265 kg. 175° movable cage boom. 2x80° cage rotation. E-Drive System for fully electric operation of the platform.

Images



Diagrams

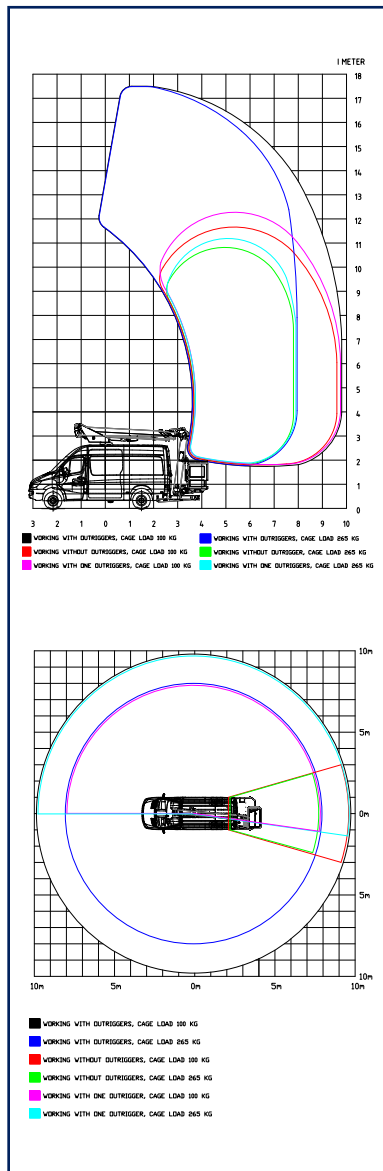

Danilift A/S reserves the right to change technical information without notice.